




PLYWOOD | NAILED WOOD | HARDBOARD
PLASTIC | WOOD/METAL | STAMPED METAL | WIRE BASKETS

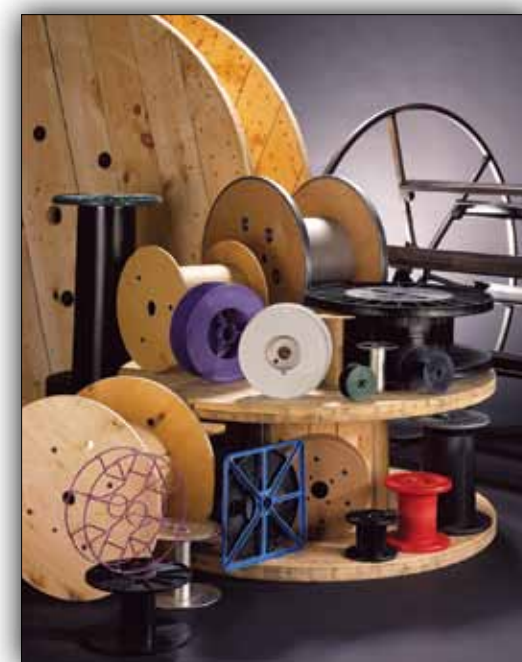

WWW.CARRIS.COM

Vermont	Rutland, VT	(802) 773-9111 Tel	(802) 770-3551 Fax
Connecticut	Enfield, CT	(860) 749.8308 Tel	(860) 749-8558 Fax
California	Madera, CA	(559) 674-0804 Tel	(559) 674-1614 Fax
Michigan	Galiem, MI	(269) 545-3400 Tel	(269) 545-3401 Fax
North Carolina	Statesville, NC	(704) 872-0981 Tel	(704) 873-0654 Fax
Virginia	Fincastle, VA	(540) 473-2210 Tel	(540) 473-2878 Fax
Mexico	Monterrey, Mexico	(011) 52-81-83-16-73-90 Tel	(011) 52-81-83-16-73-95 Fax

SPECIFICATION AND QUOTATION SHEET

For a prompt quotation, please photocopy this form, complete it and fax to Carris-Vermont at **802.770.3551**



Company Name _____			Your Name _____		
Address _____			Position _____		
City _____	State _____	Zip _____	Phone _____	Fax _____	

Type and size of material to be placed on reel: _____

Maximum weight of material to be placed on reel: _____

Quantities normally ordered: _____

A. Flange diameter: _____

B. Traverse length: _____

C. Barrel diameter: _____



D. Drive hole diameter: _____

E. Center hole diameter: _____

F. Center-to-center distance: _____

G. Start hole, diameter: _____

H. Finish hole _____

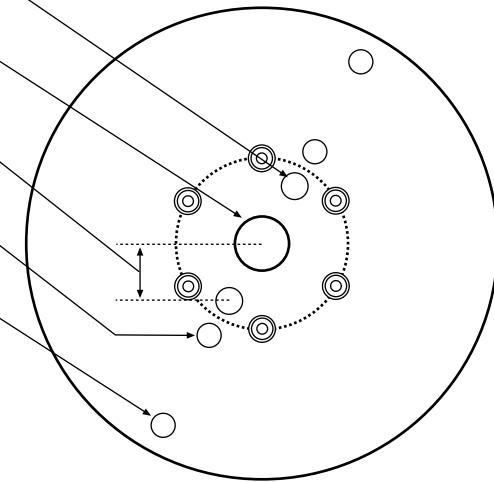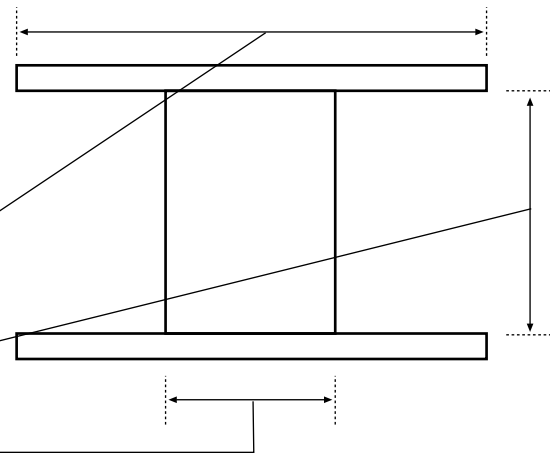

WOOD/METAL

Wood/metal reels are specifically designed for large or small quantities of in-process work. Wood/metal reels have the advantage of being made with the time-tested strength and smooth surface of hardwood plywood. For fine wire, we offer reelply, which is hardwood plywood laminated with a facing of super-smooth hardboard. Arbor holes may be either metal lined with steel tubes or steel reinforced. Lug holes can also be steel reinforced.

FLANGE MATERIALS

Hardwood Plywood

- Maple, beech and birch veneers, manufactured at our local mill, offer quality and strength
- Thickness: 3/8" (on 12" to 18" diameters); up to 1 3/8" (on 20" and above)
- Diameter: up to 60"

Reelply

- Hardwood plywood core with smooth hardboard laminated to the outer faces
- Thickness: 3/8" (on 12" to 18" diameters); up to 1 3/8" (on 20" and above)
- Diameter: regularly up to 46", inquire about 60"

BARREL MATERIALS

Galvannealed Steel

- Our highest quality barrel is cut from galvannealed sheet steel and then rolled and welded at our plant. This barrel offers excellent durability, high weight capacity and smoothness.
- Diameters: 8" to 24" and traverse lengths to 36"

Staves

- Wood staves in barrel diameters of 10" to 36" and cut to desired length
- Best suited to heavy loads or outdoor applications

PVC (Polyvinyl Chloride)

- Available for special applications such as high-winding tension, in-process uses, and where barrel smoothness is critical

Plywood

- Barrels are targeted for use where moisture may be a concern
- Our plywood mill offers rolled three-ply construction with staple-stitched seams
- Sizes: Cut to your required traverse and diameter
- Thickness: 3/6", 3/4", 5/6"

Paper Tubes

- Spiral wound from high-grade paper and glues, these are intended for use where moisture is not a concern; best buy for quality and minimal shrinkage for the lower weight ranges.
- Thicknesses: Tailored to suit your weight load
- Sizes: Regularly available in 1" increments ranging from 4" to 14" diameters; however, we can accommodate most special needs

BORINGS

- Arbor, lug, start and/or lifting holes can be reinforced with steel

FASTENERS

Bolts

- Available in 5/6" and 3/4" diameters, depending on application

Washers

- Flat or cup

